

TOP-LINE®

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ QTY: _____

TOP-LINE PART NO. _____

TOP-LINE® Stainless Steel Tubular Swing Spout

KS11-06-X0xx Series

- KS11-06-X006 6" Spout
- KS11-06-X008 8" Spout
- KS11-06-X010 10" Spout
- KS11-06-X012 12" Spout
- KS11-06-X014 14" Spout
- KS11-06-X016 16" Spout

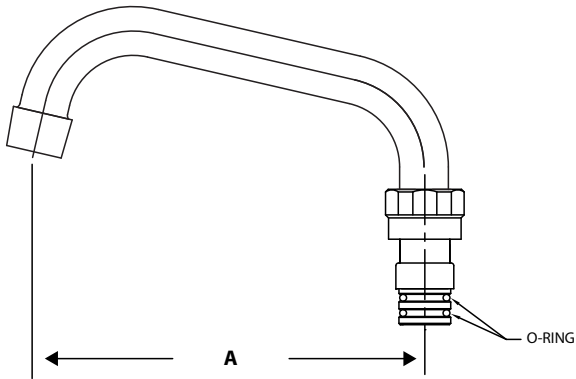

Dimensions shown in inches (mm) are for reference only and are subject to change.

Operating Temperature: 40 - 180°F (5 - 83°C)
Operating Pressure: 15 - 125psi

Approximate shipping weight - 1 lb
Warranty - 2 years parts

Heavy duty stainless steel spout is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- Leak proof double O-ring spout design

Model No.	A
KS11-06-X006	6" (152mm)
KS11-06-X008	8" (203mm)
KS11-06-X010	10" (254mm)
KS11-06-X012	12" (305mm)
KS11-06-X014	14" (356mm)
KS11-06-X016	16" (406mm)

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61 / 9

