



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____



SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

**TOP-LINE® Low Lead 8" OC Wall Mount
 Faucet with Tubular Swing Spout and
 Quarter Turn Ceramic Valves**

TLL13-81xx-SE1MKZ Series

- TLL13-8106-SE1MK 6" spout
- TLL13-8108-SE1MK 8" spout
- TLL13-8110-SE1MK 10" spout
- TLL13-8112-SE1MK 12" spout
- TLL13-8114-SE1MK 14" spout
- TLL13-8116-SE1MK 16" spout

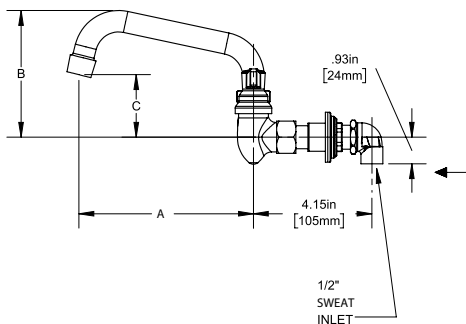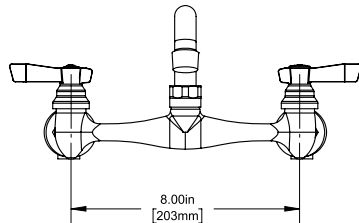

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for wall are recommended to accommodate 1/2" supply nipples.
 1/2" NPS Male Inlets
 Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 4 lbs
 Warranty - 1 year

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel tubular swing spout
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Low Lead 8" OC Wall Mount Faucet to be TOP-LINE TLL13-81xx-SE1MKZ Series in the following configuration:

- _____ TLL13-8106-SE1MKZ 6" spout
- _____ TLL13-8108-SE1MKZ 8" spout
- _____ TLL13-8110-SE1MKZ 10" spout
- _____ TLL13-8112-SE1MKZ 12" spout
- _____ TLL13-8114-SE1MKZ 14" spout
- _____ TLL13-8116-SE1MKZ 16" spout

Faucet body to be constructed of polished chrome plated brass. Valves to be quarter turn ceramic type. Handles to be lever style. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Aerator to be 2.2gpm @ 60psi standard. Includes KL40-1000 mounting kit.

MODEL NO.	A	B	C
TLL13-8106-SE1MKZ	6.11" (155mm)	4.44" (113mm)	2.19" (56MM)
TLL13-8108-SE1MKZ	8.11" (206mm)	4.86" (123mm)	2.61" (66mm)
TLL13-8110-SE1MKZ	10.11" (257mm)	5.29" (134mm)	3.04" (77mm)
TLL13-8112-SE1MKZ	12.11" (308mm)	5.71" (145mm)	3.46" (88mm)
TLL13-8114-SE1MKZ	14.11" (358mm)	6.14" (156mm)	3.89" (99mm)
TLL13-8116-SE1MKZ	16.11" (409mm)	6.56" (167mm)	4.31" (109mm)

