

Component Hardware® LED Slim Profile  
 Linkable Rigid Light for Refrigerated and  
 Ambient Applications

## LED-RLxx-x Series

LED-RL12-x	4W
LED-RL16-x	7W
LED-RL22-x	9W
LED-RL34-x	13W
LED-RL45-x	18W
LED-RL57-x	22W

Available color temperatures:

- N = Natural White, 4100 K  
 C = Cool White, 6400 K  
 W = Warm White, 3000 K

Note: Add suffix code letter to designate color temperature (K)



Optional Accessories



Voltage: 120VAC  
 Frequency: 60Hz  
 Operating Temperature: -4°F to 105°F (-20°C to 40°C)  
 Beam Angle: 120°  
 CRI: 82

Approximate shipping weight - 3 lbs  
 Warranty - 5 yrs

Linkable low profile, high light output, energy efficient LED lights

**Specifically designed for product display applications**

- Operating temperature from -4°F to 105°F (-20°C to 40°C)
- LEDs emit little heat into refrigerated space
- Corrosion-free, high impact polycarbonate housing
- Supplied with on/off switch
- Instant-on, no ballast to warm up
- Super slim, easy to install
- Link up to maximum 250W of lights together for most flexibility
- 6' (1829mm) AC cord with 2 prong straight plug included
- Supplied with PC mounting clips and zinc plated steel flat head screws

**Environmentally friendly, energy efficient**

- HACCP Compliant – LED lighting runs cooler than old incandescent and fluorescent fixtures, helping you to better control food temperatures in your refrigerators/coolers/freezers. In addition, LED lights do not contain harmful mercury, like fluorescent fixtures, eliminating a potential chemical hazard in your workplace.
- 50,000+ hours rated life; reduces landfill waste; lowers maintenance costs
- Exceeds Federal Energy Act requirement
- Contributes to LEED® energy use reduction credits

**Bright, focused light**

- White, polycarbonate housing with milky diffuser
- No ultraviolet emission; does not attract insects

**Specifications**

Model	Actual Length	Max Linking (250W)	Initial Lumens	Current Consumption
LED-RL12-x*	10.91" (263mm)	62 Units	300	65mA
LED-RL16-x*	15.20" (370mm)	35 Units	550	110mA
LED-RL22-x*	21.18" (470mm)	27 Units	720	135mA
LED-RL34-x**	32.99" (515mm)	19 Units	1050	200mA
LED-RL45-x**	44.80" (560mm)	13 Units	1550	280mA
LED-RL57-x**	56.61" (764mm)	11 Units	1800	350mA

\*(2) clips of each style with screws included

\*\*\*(3) clips of each style with screws included

**Accessories**

LED-RL-X051	90° Linking Cable, 6" Long
LED-RL-X052	90° Power Cord, 36" Long
LED-RL-X051-12	12" Straight Linking Cable
LED-RL-X111	90° Linking Cable, 12" Long



# LED-RLxx-x Series

LED Linkable Rigid Light for Refrigerated and Ambient Applications



**COMPONENT  
HARDWARE**

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.componenthardware.com](http://www.componenthardware.com)

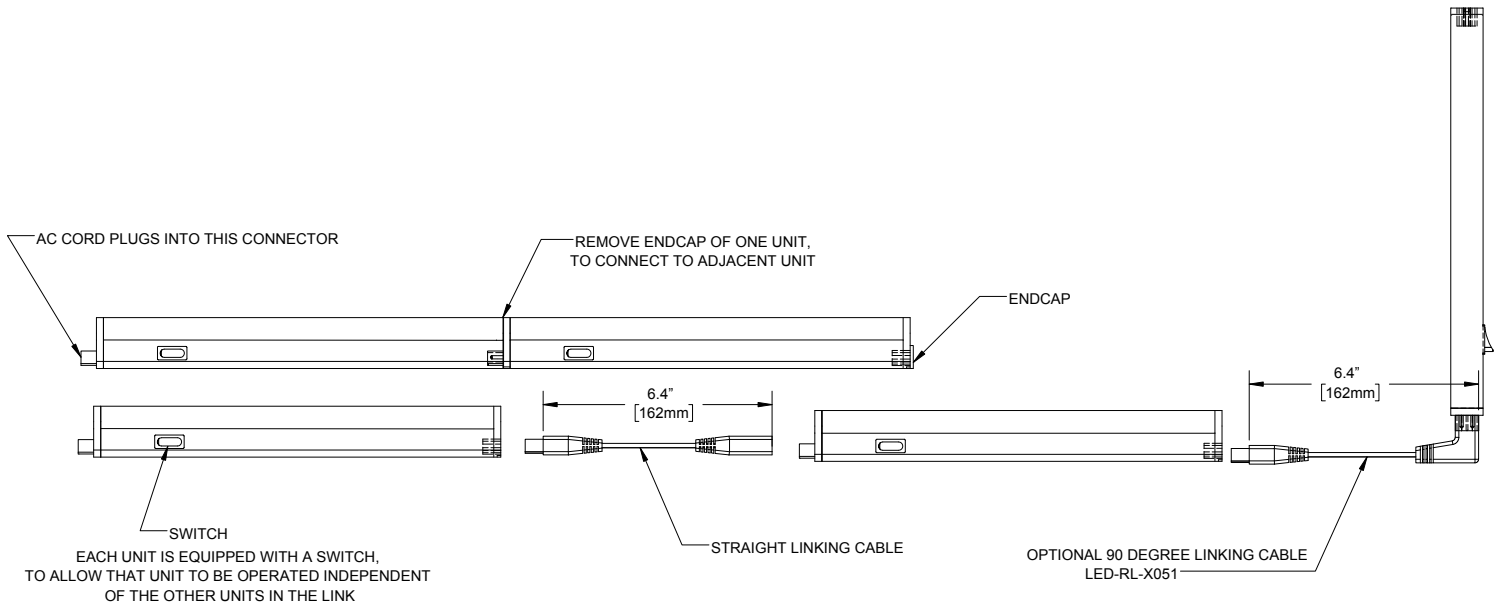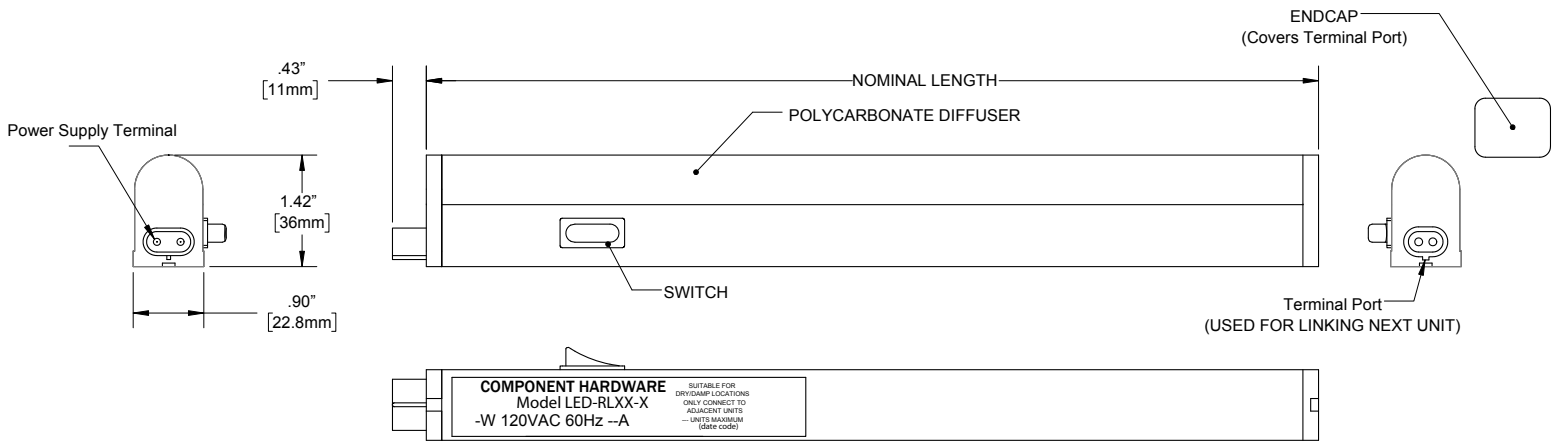

Dimensions shown in inches (mm) are for reference only and are subject to change.