



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____



SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

TOP-LINE® Low Lead 8" OC Wall Mount
 Faucet with Double Jointed Tubular Swing
 Spout and Quarter Turn Ceramic Valves

TLL13-81xx-SE1Z Series

- TLL13-8118-SE1Z 18" spout
- TLL13-8120-SE1Z 20" spout
- TLL13-8122-SE1Z 22" spout
- TLL13-8124-SE1Z 24" spout
- TLL13-8126-SE1Z 26" spout
- TLL13-8128-SE1Z 28" spout

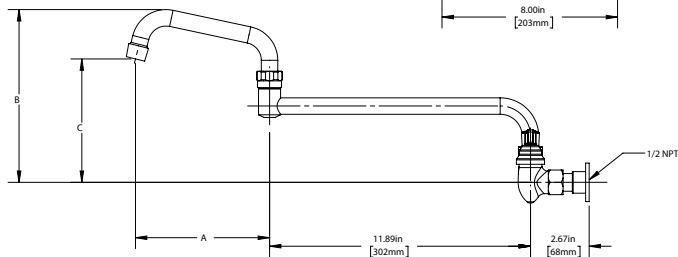

Dimensions shown in inches (mm) are for reference only
 and are subject to change.

1-1/8" (29mm) holes for wall are recommended to
 accommodate 1/2" supply nipples.

1/2" NPS Male Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Approximate shipping weight - 4 lbs
 Warranty - 1 year

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel double jointed tubular swing spout
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Low Lead 8" OC Wall Mount Faucet to be TOP-LINE TLL13-81xx-SE1Z
 Series in the following configuration:

- _____ TLL13-8118-SE1Z 18" spout
- _____ TLL13-8120-SE1Z 20" spout
- _____ TLL13-8122-SE1Z 22" spout
- _____ TLL13-8124-SE1Z 24" spout
- _____ TLL13-8126-SE1Z 26" spout
- _____ TLL13-8128-SE1Z 28" spout

Faucet body to be constructed of polished chrome plated brass. Valves to
 be quarter turn ceramic type. Handles to be lever style. Spout to be stainless
 steel double jointed tubular swing style with leak proof double O-ring seal
 design. Aerator to be 2.2gpm @ 60psi standard.

MODEL NO.	A	B	C
TLL13-8118-SE1Z	6.11" (155mm)	7.87" (200mm)	5.63" (143mm)
TLL13-8120-SE1Z	8.11" (206mm)	8.28" (210mm)	6.03" (153mm)
TLL13-8122-SE1Z	10.11" (2577mm)	8.70" (221mm)	6.45" (164mm)
TLL13-8124-SE1Z	12.11" (308mm)	9.13" (232mm)	6.88" (175mm)
TLL13-8126-SE1Z	14.11" (358mm)	9.55" (243mm)	7.30" (186mm)
TLL13-8128-SE1Z	16.11" (409mm)	9.98" (253mm)	7.73" (196mm)

